


# Bump Steer Kit Installation Instructions

## TOOLS REQUIRED:

- Hydraulic jack and jack stands
- Standard and Metric socket and wrench set
- Mallet
- Cutoff Wheel

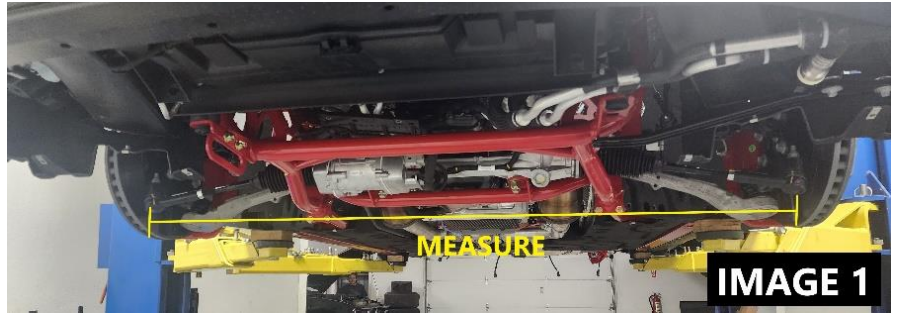

## INSTALLATION

1. Lift the front of the vehicle and safely support on jack stands. Remove both front wheels.
2. Measure the distance from each outer tie rod end as shown in **IMAGE 1**
3. Loosen the nut on the outer tie rod end (**IMAGE 2**) and hammer to break the taper free from the spindle
4. Remove and discard the outer tie rod end.
5. Thread the new jam nut, tie rod adjuster, and rod end onto the inner tie rod. Be sure the inner tie rod and rod end are evenly threaded into the adjuster sleeve (**IMAGE 3**)



**NOTE:** *The inner tie rod will need to be trimmed to get the proper toe alignment. Use the measurement taken in Step 2 and allow for adjustment of toe in as well as toe out. This may take a couple of tries. **Measure twice, cut once.***



[WWW.BMRSUSPENSION.COM](http://WWW.BMRSUSPENSION.COM)


*This product is an aftermarket accessory and not designed by the vehicles manufacturer for use on this vehicle. As such, Buyer assumes all risk of any damage caused to the vehicle or person during installation or use of this product.*

# Bump Steer Kit Installation Instructions

6. Place the jam nut, spacers, rod end, and lock nut onto the stud (**IMAGE 4**)

7. Insert the tapered stud into the spindle (**IMAGE 4**) and tighten the nut to **50 ft/lbs**

8. Use a jack to mock up the lower control arm at ride height.

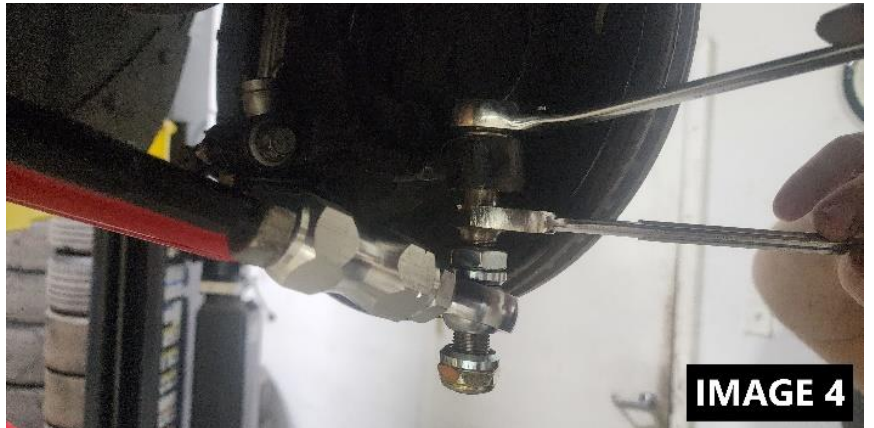


**IMAGE 4**

9. Adjust the bump steer adjuster up and down until you get the toe rod **parallel** with the lower control arm. **IMAGE 5**

10. Use the measurement taken in step two to set the toe adjustment back to the previous setting.

**NOTE: It is recommended to have the vehicle professionally aligned after installation**

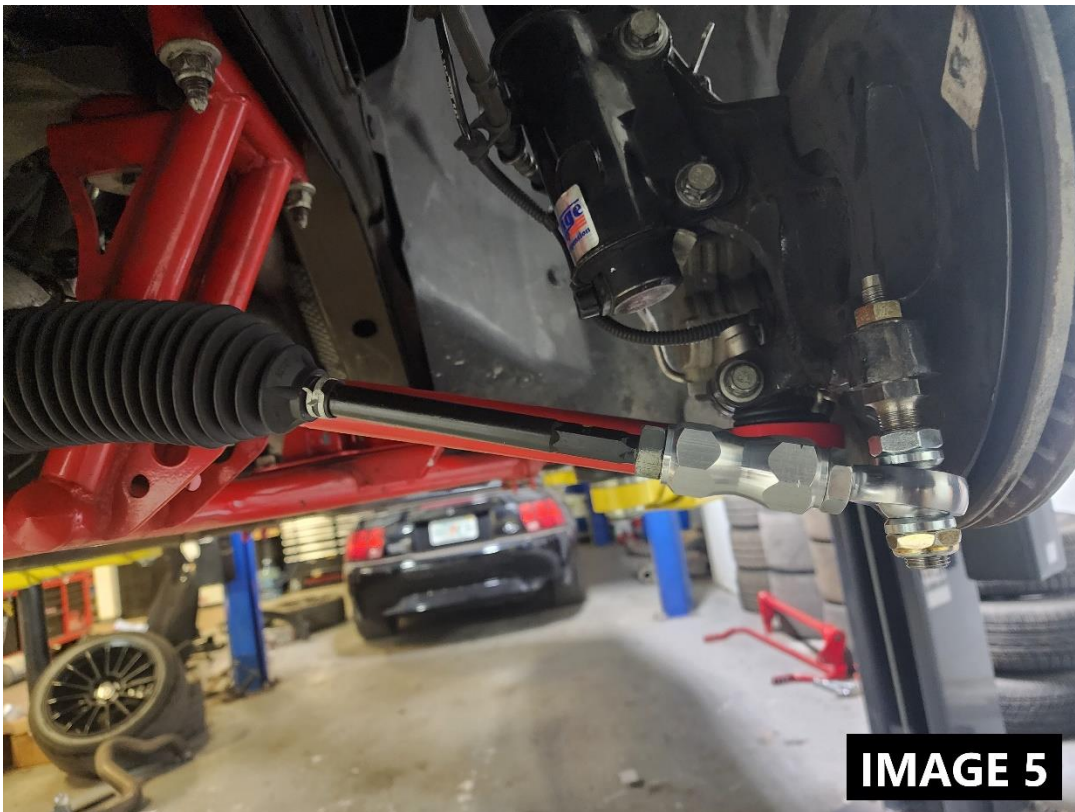

**IMAGE 5**

[WWW.BMRSUSPENSION.COM](http://WWW.BMRSUSPENSION.COM)

*This product is an aftermarket accessory and not designed by the vehicles manufacturer for use on this vehicle. As such, Buyer assumes all risk of any damage caused to the vehicle or person during installation or use of this product.*