



## AA043 Installation Instructions

### Tools Required:

Jack and jackstands

Wrenches and Sockets - 15mm, 18mm, 21mm, 24mm, E8 (external torx)

Pry-bar or spring compressor

1. Place front of vehicle securely on jackstands, place jack under a-arm that will be removed first.
2. Remove front wheels.
3. Using the **15mm socket**, remove sway bar end links as shown in **IMAGE 1**.
4. Unclip ABS wires from the chassis as shown in **IMAGE 2**.

**IMAGE 1**



**IMAGE 2**

5. Using the **E8 socket**, remove the ABS sensor from the shock.
6. Remove **15mm** caliper bolts and hang the caliper as shown in **IMAGE 4**.



**IMAGE 3**



**IMAGE 4**



## AA043 Installation Instructions



**IMAGE 5**

8. Using the **21mm socket and 24mm wrench**, remove the lower strut bolts. **NOTE: Make sure jack is secure and has light pressure on the lower arm before removing strut bolts.**
9. Remove **24mm lower ball joint castle nut** as shown in **IMAGE 5**.
10. Remove spindle, followed by the spring. **NOTE: Use caution removing the spring, as it can have a large amount of pressure on it. A spring compressor or an extra person with a pry bar to hold the spring in position is recommended.**
11. Using the **21mm socket and 24mm wrench**, remove the lower control arm bolts. **NOTE: On some cars the rack may need to be moved to remove the front control arm bolt. Loosen the 15mm and 18mm rack bolts and 13mm steering shaft bolt and slide rack forward to allow removal of control arm bolt.**
12. Remove lower control arm.
13. Install new lower control arm re-using stock hardware as shown in **IMAGE 6**.
14. Place jack under new control arm.
15. Install spring, ensuring the spring is clocked correctly and lines up with the spring ramp in the spring cup on the a-arm.




**IMAGE 6**

16. Use two small strips masking tape and tape the included Aluminum spring spacer ring to the top of the spring isolator to keep it in place while you install the top of the spring into the pocket in the k-member. **NOTE: If using a spring compressor, compress spring before installing to allow the arm to move upward enough to bolt to the spindle. If you have an extra person, you can use a pry bar to hold the spring in position as you jack up the arm. Use caution as the spring will have a large amount of pressure on it.**
16. Using the jack, lift the arm up until the spindle can be reinstalled using the **24mm lower ball joint nut**, followed by the **21mm and 24mm strut bolts** as shown in **IMAGE 7**.
17. Tighten **15mm and 18mm steering rack bolts**, along with **13mm steering shaft bolt**.



## AA043 Installation Instructions

**IMAGE 7**

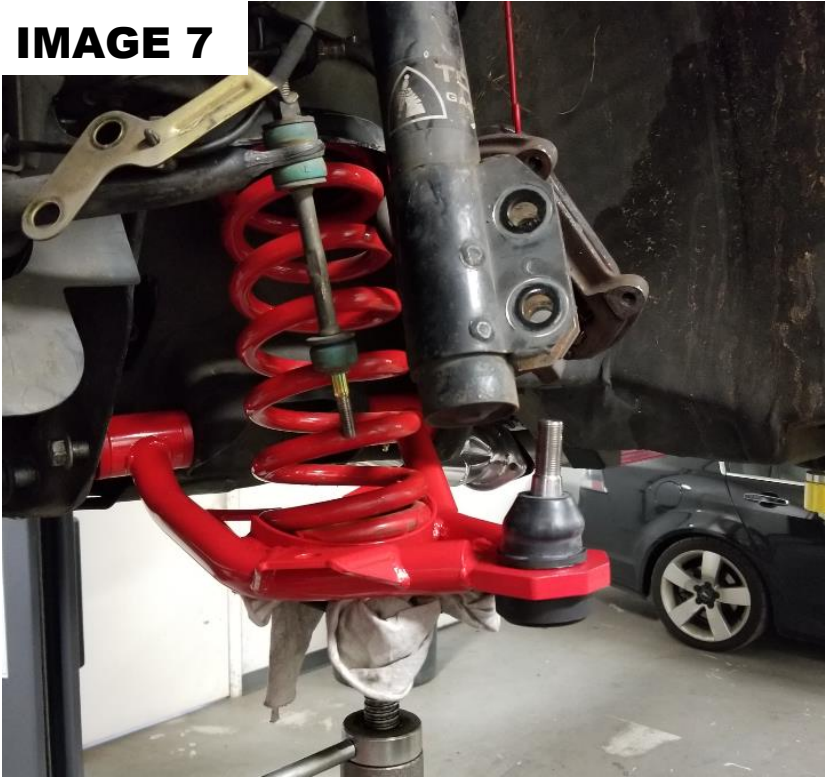

**IMAGE 8**

18. Install ABS line bracket and **24mm nuts** on strut bolts as shown in **IMAGE 8**.
19. Using **the E8 socket**, install ABS sensor and clip ABS wires back in.
20. Install rotor and caliper with **15mm caliper** bolts.
21. Reinstall **15mm** swaybar endlink bolts
22. Reinstall wheel.
23. Repeat steps for other side.

### **Torque Specs:**

- Sway Bar End Links: 14 ft-lbs
- Ball joint to Steering Knuckle: 130 ft-lbs
- Caliper to Steering Knuckle: 90ft-lbs
- Control Arm to Cross-member: 170ft-lbs
- Steering Rack to Cross-member: 35 ft-lbs
- Shock to Steering Knuckle: 170 ft-lbs
- Tie Rod Ends to Steering Knuckle: 35 ft-lbs
- Wheel to Hub: 95ft-lbs

**WWW.BMRSUSPENSION.COM**

*This product is an aftermarket accessory and not designed by the vehicles manufacturer for use on this vehicle. As such, buyer assumes all risk of any damage caused to the vehicle/person during installation or use of this product.*